


Ordering examples and standard alloys available
 Bestellweise und die standardwerkstoffe
 Façon de commander et alliages courants

Standard alloys and sizes
 alliages standards et sections


Carbon steel - 4,5,6 mm
 ss304 (1.4301) - 4,5,6 mm
 ss310 (1.4841) - 4,5,6 mm
 ss309 (1.4828) - 4,5,6 mm
 ss330 (1.4864) - 4,5,6 mm
 alloy 601 - 4,5,6,mm

Example - Beispiel - Exemple

STB.6 - 250 - 310

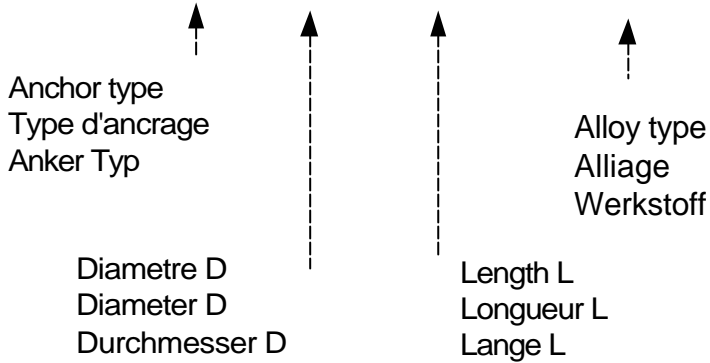


STB

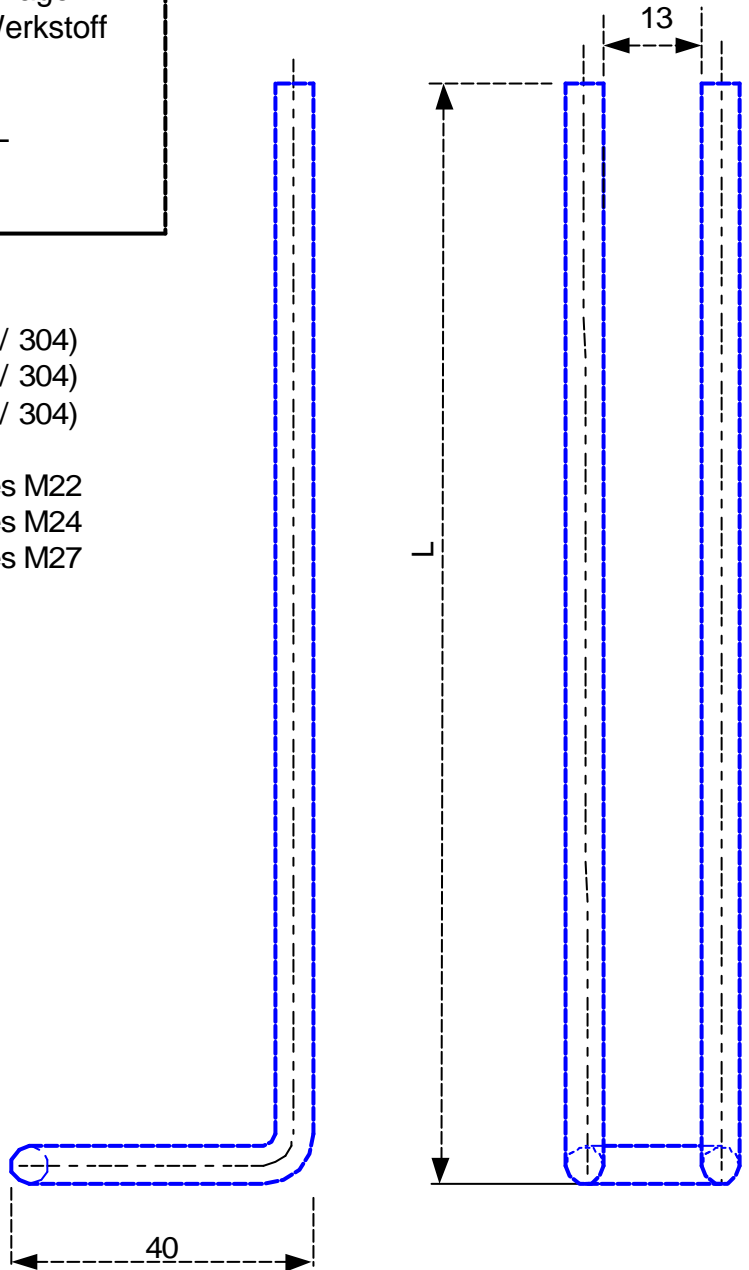

Notes:

For 4.00mm dia pins, use M22 RINGS (c.s. / 304)
 For 5.00mm dia pins, use M24 RINGS (c.s. / 304)
 For 6.00mm dia pins, use M27 RINGS (c.s. / 304)

Pour des tiges diam. 4.00, utiliser des rondelles M22
 Pour des tiges diam. 5.00, utiliser des rondelles M24
 Pour des tiges diam. 6.00, utiliser des rondelles M27



IRIS - Industrial Refractories & Insulating Specialities
 Z.A.E. "LES Dix Muids" F - 59770 MARLY (France)

Tel : +33 (0)3.27.21.52.80
 E-mail : contact@irisfrance.com

Fax : +33 (0)3.27.21.52.99
 Web : www.irisfrance.com

This drawing is the property of IRIS. Unauthorised use of patented features and/or reproduction of this drawing is strictly prohibited