

DESIGNATION EXAMPLE

TWM.8(60) - 200(100) - 304

↑ Anchor type ↑ Diameter D ↑ Angle α ↑ Length L ↑ Step S ↑ Alloy


Standard alloys

PLEASE REFER TO PAGE N°2

TWM

Ø6 T= 13
 Ø8 T= 13
 Ø10 T= 15

R = 4xØ

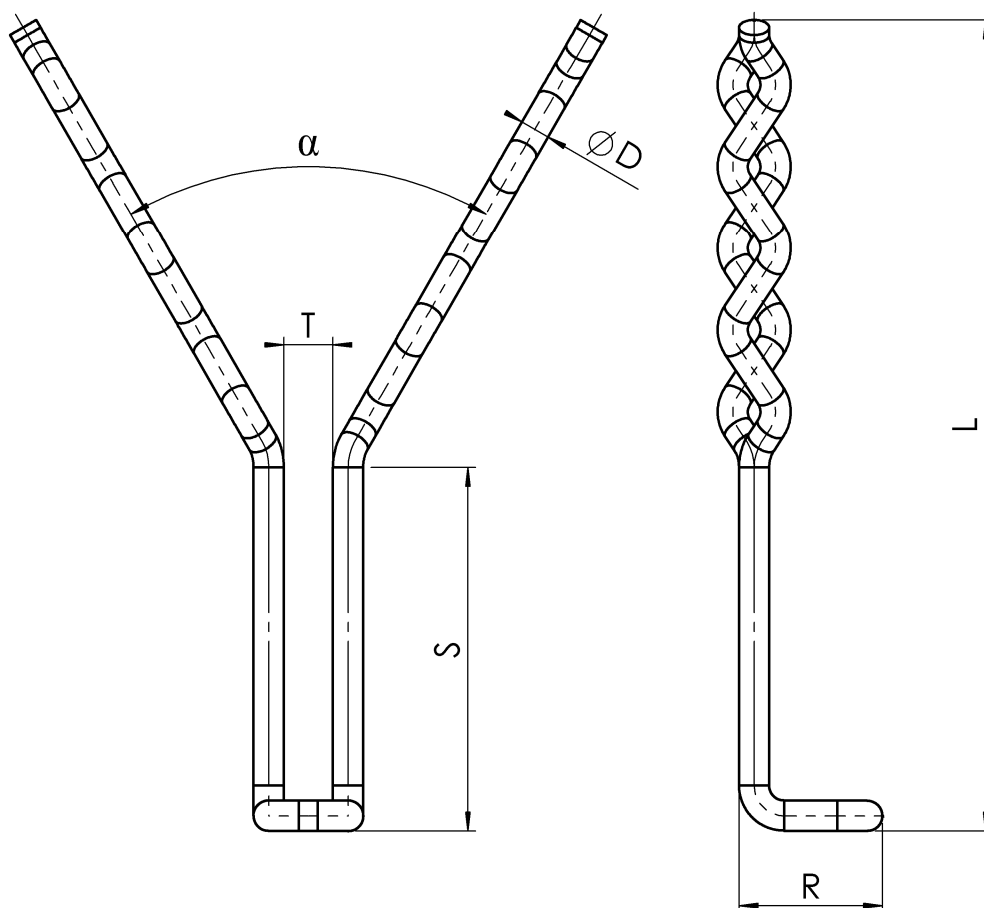

IRIS - Industrial Refractories & Insulating Specialities

Parc d'Activités Aéroport Ouest - Rouvignies - F - 59328 VALENCIENNES Cedex (France)

Tél : +33 (0)3.27.21.52.80


E-mail: contact@irisfrance.com

Fax : +33 (0)3.27.21.52.99


Web: www.irisfrance.com

This drawing is the property of IRIS. Unauthorised use of patented features and/or reproduction of this drawing is strictly prohibited

ANCHOR TW

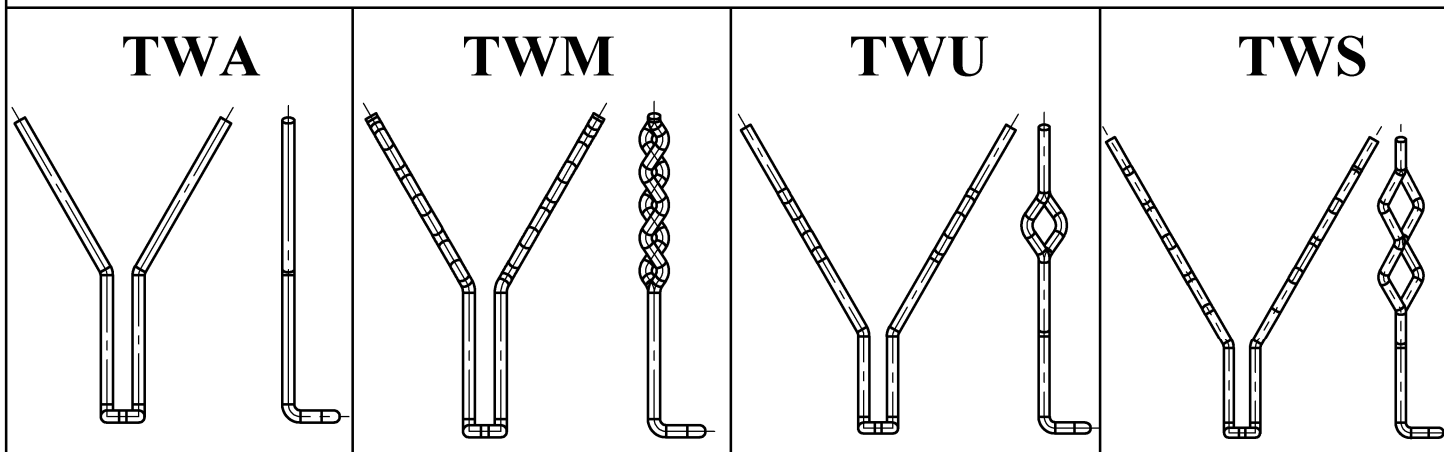


Ex: TWA

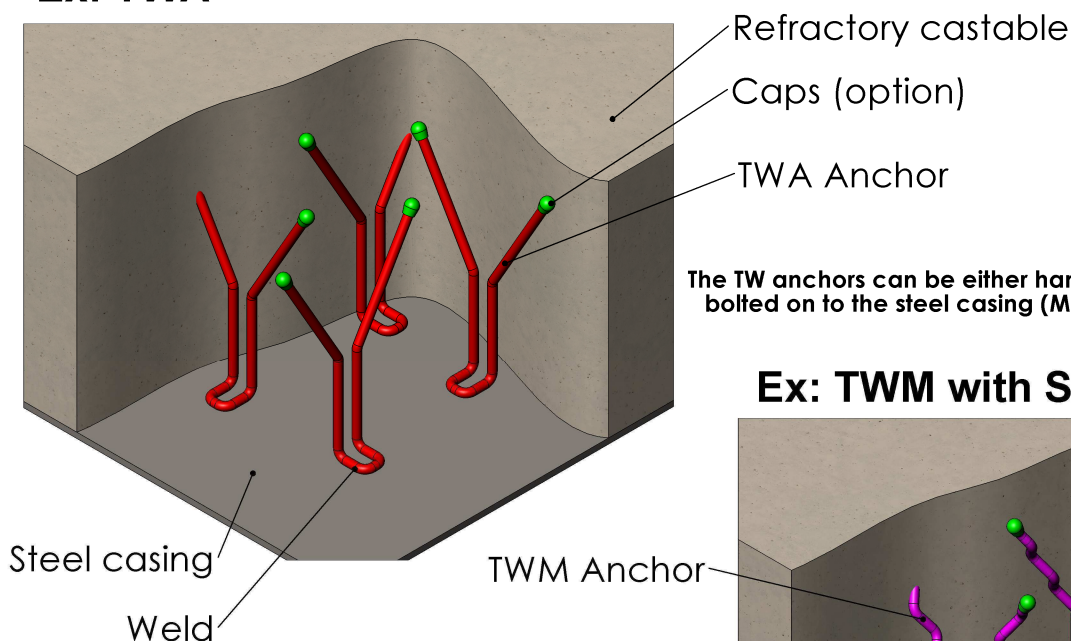

The TW anchors can be either hand welded with electrode or bolted on to the steel casing (M10 recommended or M12)

Ex: TWM with Stud

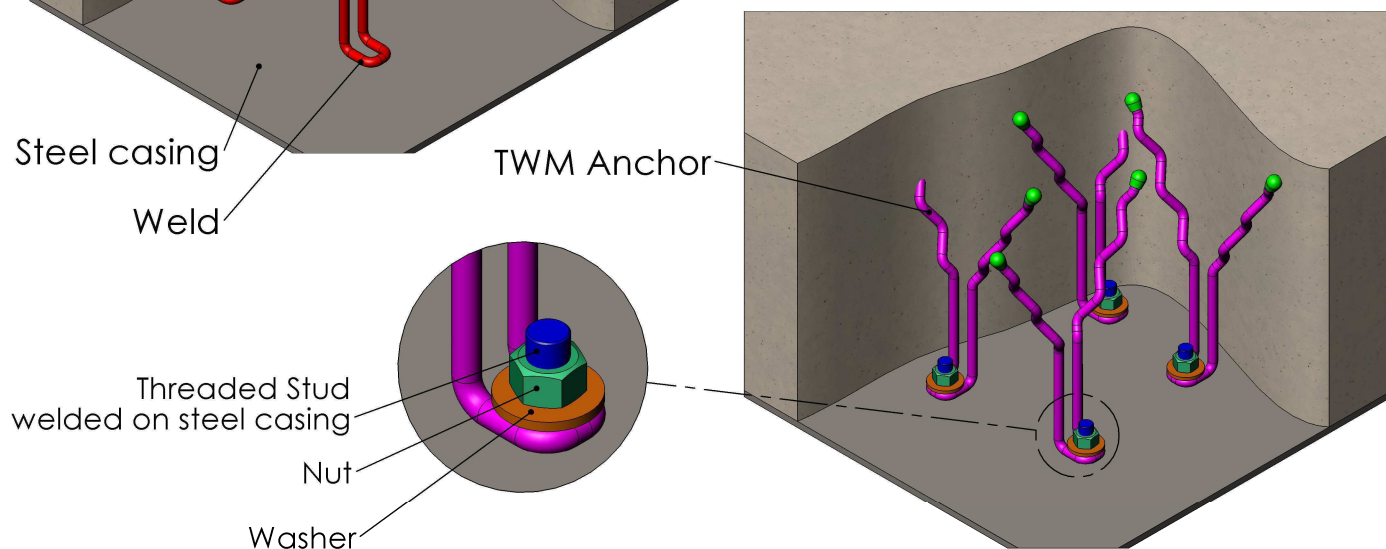

IRIS produces anchors from cold drawn wires, annealed before wiredrawing, with a tensile strength between 700 and 900 N/mm².

IRIS produces anchors with a soft bending technology through robots operating hydraulic tools.

This technology allows to reduce mechanical stress inside the steel structure, to limit the formation of marks and cracks in which corruptions can start rapidly and generate drastic problem for the lining.



IRIS - Industrial Refractories & Insulating Specialities

Parc d'Activités Aérodrome Ouest - Rouvignies - F - 59328 VALENCIENNES Cedex (France)

Tél : +33 (0)3.27.21.52.80

E-mail: contact@irisfrance.com

Fax : +33 (0)3.27.21.52.99

Web: www.irisfrance.com

This drawing is the property of IRIS. Unauthorised use of patented features and/or reproduction of this drawing is strictly prohibited