

DESIGNATION EXAMPLE

VS.6(60) - 125 - 304

Anchor type

Diameter D

Angle




Length L

Alloy

Standard alloys

PLEASE REFER TO PAGE N°2

VS = ss304
SS = ss310
 (other alloys)

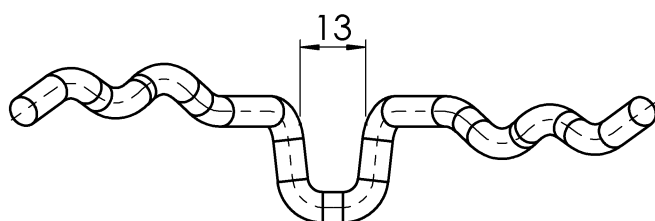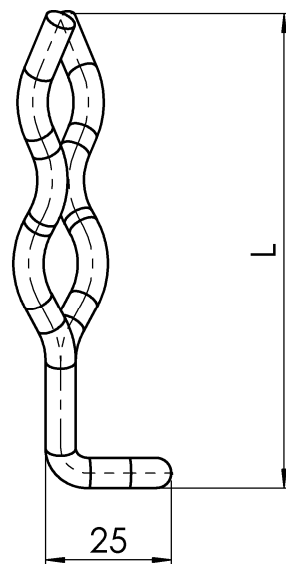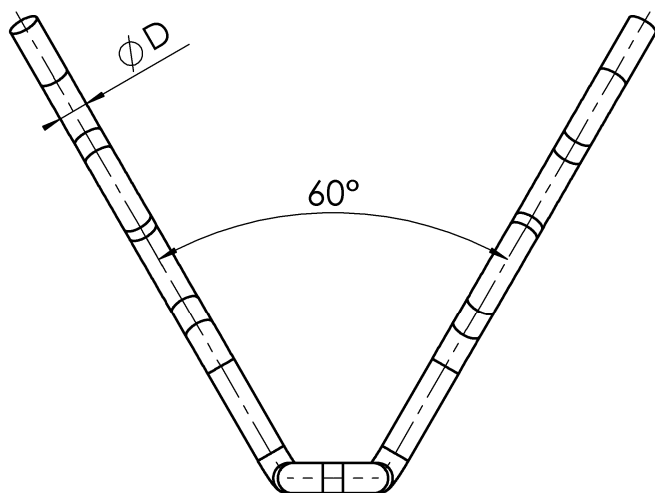

OPTIONS : see page C3-08



IRIS - Industrial Refractories & Insulating Specialities

Parc d'Activités Aéroport Ouest - Rouvignies - F - 59328 VALENCIENNES Cedex (France)

Tél : +33 (0)3.27.21.52.80

E-mail: contact@irisfrance.com

Fax : +33 (0)3.27.21.52.99

Web: www.irisfrance.com

This drawing is the property of IRIS. Unauthorised use of patented features and/or reproduction of this drawing is strictly prohibited

OPTIONS



VS or SS.OS (On Stud)

Welded on threaded Stud

DESIGNATION:

VS.6(60) -125 - 304 - OS - 020 - 304

see page C3-11

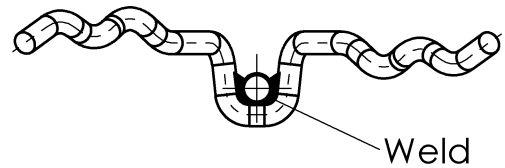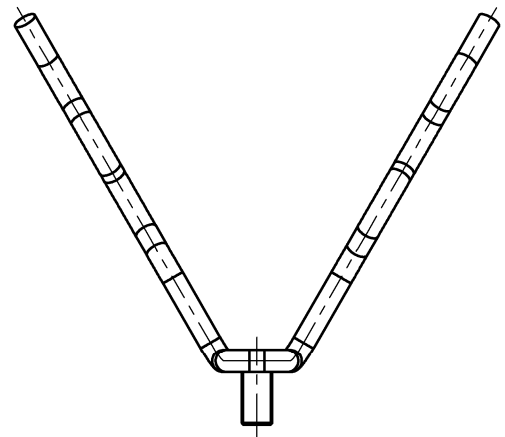



VS or SS.ON (On Nut)

Welded on Nut

DESIGNATION:

VS.6(60) -125 - 310 - ON - M6 - 310

see page C3-10

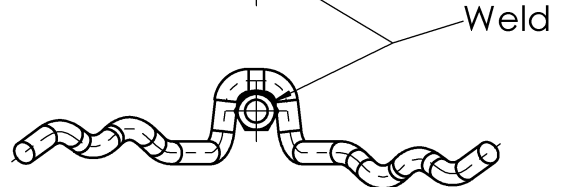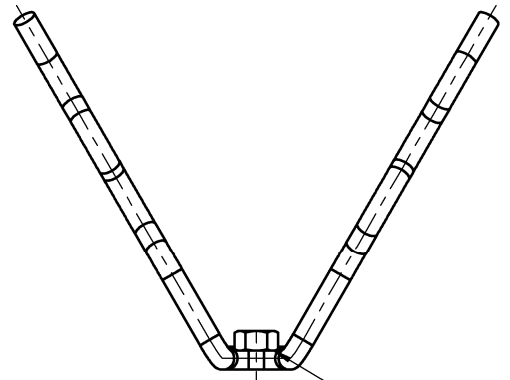


Option Caps = C

DESIGNATION:

VS.6(60) -125 - 304 - C

Plastic caps on top of anchors allow to avoid stress and eventually cracks due to the thermal expansion of steel higher than castable expansion.

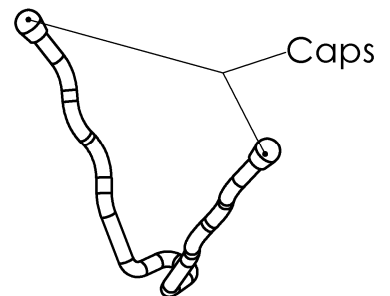

IRIS - Industrial Refractories & Insulating Specialities

Parc d'Activités Aérodrome Ouest - Rouvignies - F - 59328 VALENCIENNES Cedex (France)

Tél : +33 (0)3.27.21.52.80


E-mail: contact@irisfrance.com

Fax : +33 (0)3.27.21.52.99


Web: www.irisfrance.com

This drawing is the property of IRIS. Unauthorised use of patented features and/or reproduction of this drawing is strictly prohibited

ANCHOR VS.

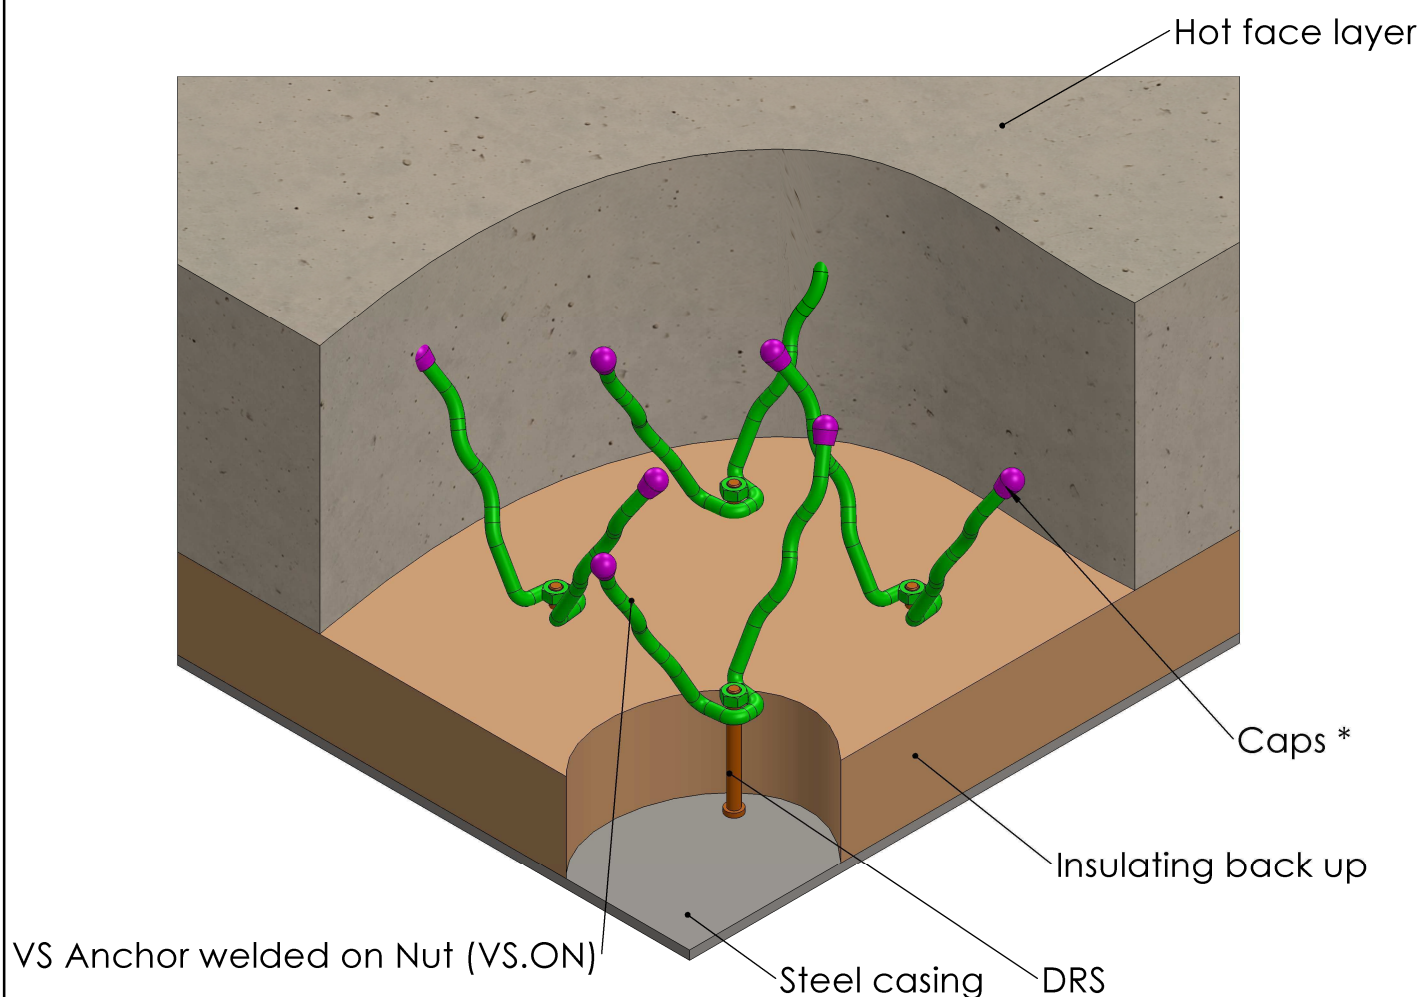

OTHER EXAMPLE :

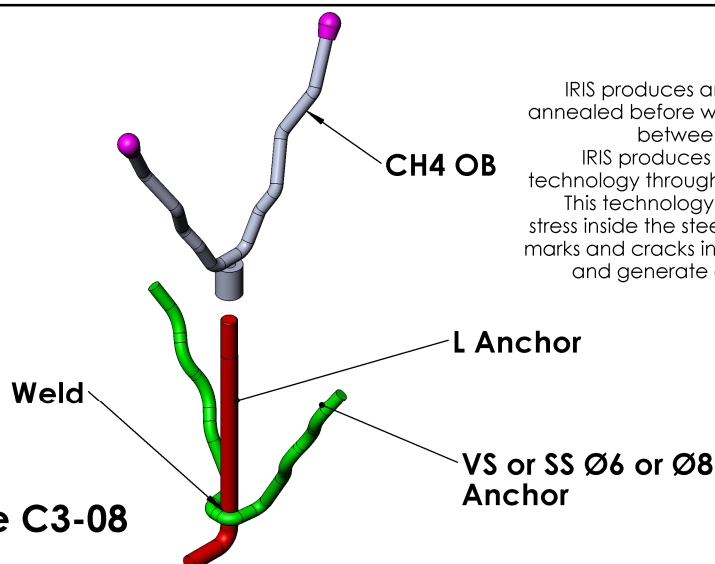

IRIS produces anchors from cold drawn wires, annealed before wiredrawing, with a tensile strength between 700 and 900 N/mm².

IRIS produces anchors with a soft bending technology through robots operating hydraulic tools. This technology allows to reduce mechanical stress inside the steel structure, to limit the formation of marks and cracks in which corruptions can start rapidly and generate drastic problem for the lining.

* : OPTION: see page C3-08



IRIS - Industrial Refractories & Insulating Specialities

Parc d'Activités Aéroport Ouest - Rouvignies - F - 59328 VALENCIENNES Cedex (France)

Tél : +33 (0)3.27.21.52.80

E-mail: contact@irisfrance.com

Fax : +33 (0)3.27.21.52.99

Web: www.irisfrance.com

This drawing is the property of IRIS. Unauthorised use of patented features and/or reproduction of this drawing is strictly prohibited